

## Product Overview

Giganet Battery Pack is compatible with Giganet 6kVA Single Phase Online UPS (GN-UPS-6KVAX-RT) and Giganet 10kVA Single Phase Online UPS (GN-UPS-10KVAX-RT).



## FEATURES


Product is compliant with RoHS & REACh

## Product Specification

Type	Description
Rack Unit Size	3U
Battery Voltage	±96/±108/±120Vdc (Adjustable)
Capacity (Standard Unit)	9Ah/12V (7Ah/12V optional)
Typical recharging time	6~8 hours (to 90% of full capacity)
Charging Current	1A (Standard unit); Long run unit Max.current 10A (Charging current can be set according to battery capacity)
Battery type	VRLA (Lead-acid maintenance free battery)
Colour	Black
Dimensions in mm (WxHxD)	440x131x680 mm
Weight	55 KG to 70 KG
Product Mounting	Stand-alone battery stack
Maximum Battery capacity	20pcs of 12V/7AH or 12V/9AH
Accessories/Equipment	Installation guide, Battery connection cables, breaker, terminal etc.

## ENVIRONMENTAL CONDITIONS

Operating Temperature	°C	0 to 40
Storage Temperature	°C	15 to 40
Operating Humidity	%RH	0 to 90%
Storage Humidity	%RH	0 to 90%

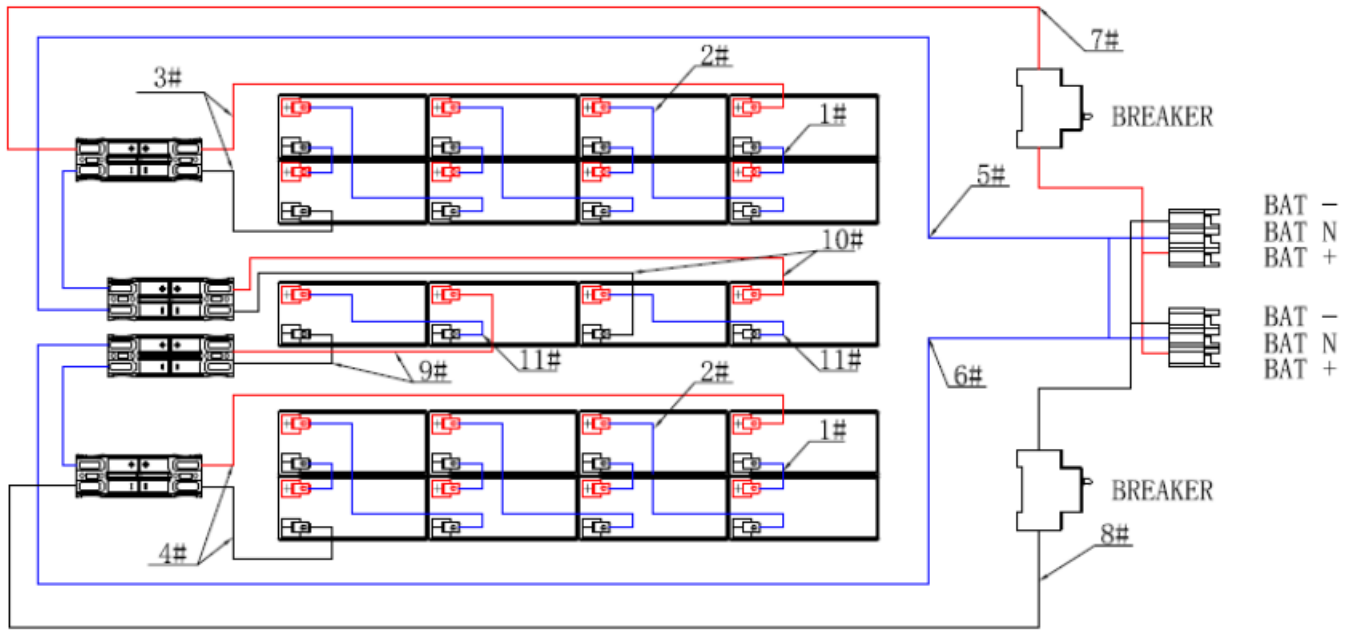

**Ordering Information**

Part Number	Product Description
GN-EBP-6-10KVA-2012V-RT	GIGANET External Battery Pack for 6-10kVA Single Phase Online Double Conversion UPS with 20x12V Batteries

**NOTE:** Battery “+” “-” poles cannot be reversed, also cannot short the battery “+” “-” poles, otherwise batteries would be damaged or other accidents would happen. Don’t touch the battery “+” “-” poles at the same time. It’s better only a single man to make the operation.