


The GIGANET copper pre-terminated CAT 6A F/FTP shielded copper trunk assemblies provide cost effective high performance for Data Centers and quick network deployment between telecommunication racks. Factory termination are T568B and testing ensures guaranteed performance compared to field terminated installation saving time and labor. The GIGANET copper trunk assemblies are available in various lengths and a choice of 6 or 12 cable bundle using PVC jacket.

CABLE CHARACTERISTICS
6 or 12 legged cable bundles PVC cable jacket
Factory terminated and tested
Rapid Deployment
High Performance and Reliability
Assemblies made to length
Direct Connection to Equipment/Panel
Custom made to order
Fast and easy installation with reduced labor costs
Pulling eye to ease Installation
Qualified for PoE and PoE+ IEEE 802.3at.
Pre-terminated assemblies are eligible for GIGANET warranty
Flame Resistant
0.57mm / 23 AWG solid Plain Copper
All pairs shielded with Drain Wire

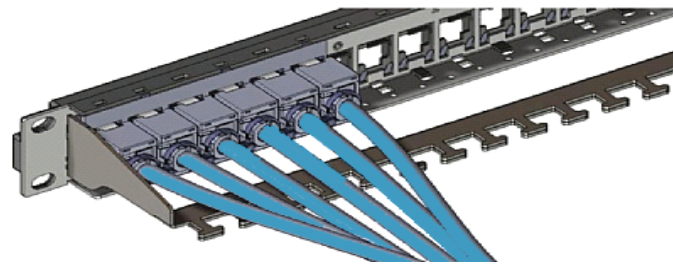

PRODUCT INFORMATION	
Part Number	Product Description
GN-C6A-F/FTP-PVC-CTA-06L-XX	Giganet Category 6A 6 Leg x F/FTP PVC Trunking Assemblies
GN-C6A-F/FTP-PVC-CTA-12L-XX	Giganet Category 6A 12 Leg F/FTP PVC Trunking Assemblies

where  
XX =Cable length in Meters (2-72)

