


Giganet Fibre Optic Adaptors are a range of high-quality adaptors which have high precision alignment sleeves for high reliability and better repeatability. The housing is available in different colours (for SC and LC only) and with options for flange or flangeless body and metal clips.

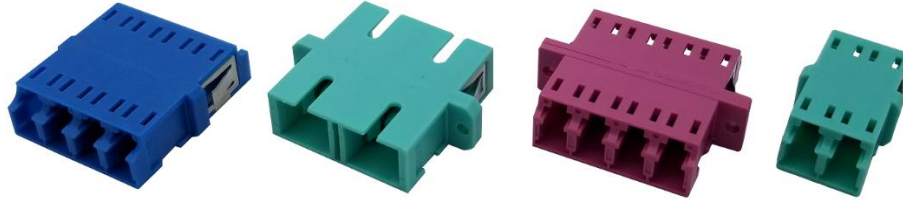

FEATURES	
Complies with IEC , TIA and Telcordia standards	
High precision alignment sleeve	
Low insertion loss and high repeatability	
ROHS, REACH SvHC compliant	

APPLICATION	
Telecommunications networks	
CATV, LAN, MAN, and WAN application	
Fibre-to-the-home	
Premises distribution	

ADAPTOR SPECIFICATIONS		
Parameter	Value	Standards
Insertion Loss (typical)	0.1dB	IEC 61300-3-4
Mating Durability	500	IEC 61300-3-4
Operating Temp.	-25°C ~ +70°C	IEC 61300-2-22

**ORDERING INFORMATION**

**PRODUCT PART NO CONFIGURATION GN-ADPT-1-2-3-4-5**

GN-ADPT	1	ADAPTOR CONFIG	2	FIBRE TYPE	3	FIBRE PORT	4	Flange (ONLY SC/LC)	5	HOUSING COLOR (ONLY SC/LC)
	SC	SC	S	Single mode	S	Simplex	F	Flange	B	Blue
	SCA	SCAPC	M	Multimode	D	Duplex	N	No flange	G	Green
	LC	LC			Q	Quad			BG	Beige
	LCA	LCAPC							AQ	Aqua
	FC	FC							EV	Erica Violet
	FCA	FCAPC								
	ST	ST								

**GN-ADPT-LCA-S-Q-N-G : Giganet Fiber Adapter LCAPC, Single mode ,Quad,No flange ,Green Color**